





STANLEY GMT SERIES

Automatic Swing Door System **DSW-100**





The Stanley GMT Series automatic swing door operator, DSW-100, is engineered to provide an effective and cost efficient solutions to provide automation to virtually any new or existing swing door.



- Stanley Swing Door Operator in Commercial Application
 - rende

Stanley Automatic Door Controls

- Operates as a manual door with the option of activation from varies application:
 - Push Button
 - Wall-switch
 - Card reader
 - Touch free system




Stanley Swing Door Operator in Hospital Application





Technical details and Specifications


Power Required	220V
Power Consumption	50W
Maximum Door Weight	100kg (See below efficiency table)
Maximum Door Width	1200mm
Opening Time (Adjustable)	3s – 7s
Hold Open Time (Adjustable)	1s – 30s
Max. Door Frame Depth	450mm
Max. Opening Angle	120°
Optimum operation temperature	-20°C - 50°C
Operator Weight	6.5kg
Operator Dimension	
Length	515mm
Width	90mm
Height	95mm

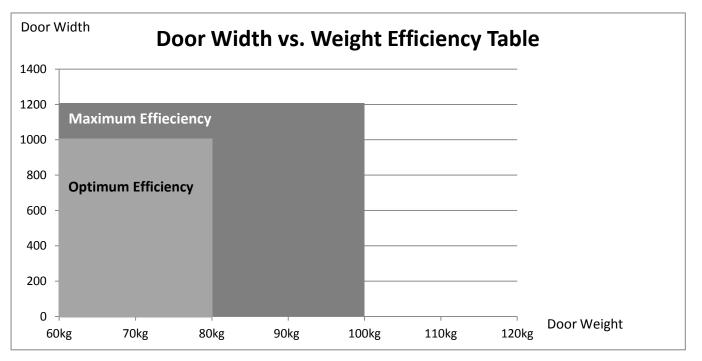



Installation of Base Mounting Plate


Mounting of DSW-100

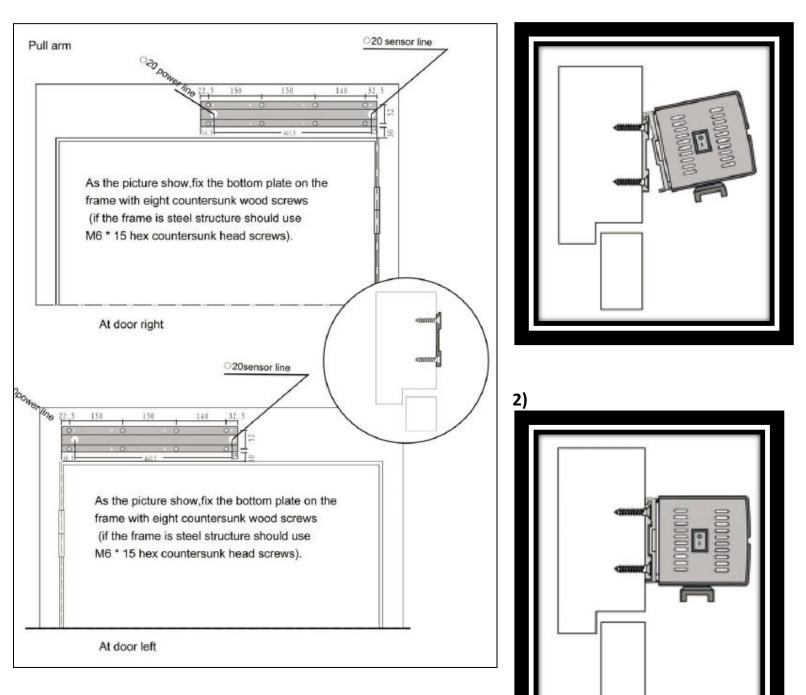





Technical details and Specifications

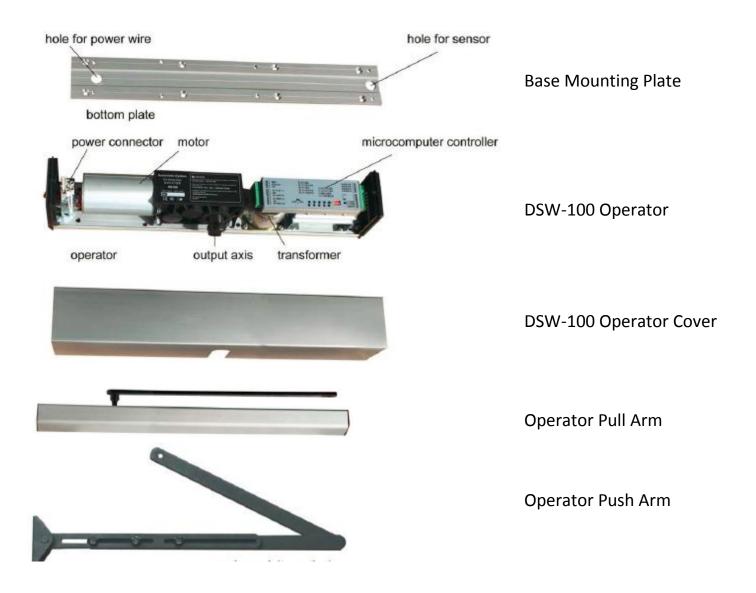





Swing Door Products from Stanley GMT swing door operator

For years, Stanley ranges of swing door operators have provided easy access and smooth traffic flow in high-traffic retail, commercial and industrial applications with unbeaten performance and reliability.

- Designed to fit a wide range of swing applications.
- Choose from low-energy to full energy solutions.
- Controller configuration via Bluetooth[®] Technology.
- Most solutions powered by an advanced microprocessor controller for intelligent performance.
- Door packages are custom manufactured to fit your job requirements.



StanleyBlack&Decker

China & North East Asia

STANLEY GMT Hardware Co.,Ltd. 2/F,Tower C,No.7001,Zhongchun Rd,Minhang District,Shanghai,China

South East Asia Black & Decker Asia Pacific Pte Ltd. 67 Ubi Avenue 1, #02-13, Starhub Green Singapore 408942 Distributed by: